

CRM 9250

Intelligent Cash Recycler



Description

The CRM 9250 intelligent cash recycler is designed to provide the highest uptime in the market with a minimum in maintenance needs. It is supporting 64 denominations at one time with high validating speed and offering up to 4 recycling cassettes plus one multifunctional acceptance cassette. OCR technology enables to record and recognize note's serial number to make transactions more secure and to avoid any disputes. Our intelligent cash cassette swapping solution can reduce the cash handling cost and improve efficiency. Module design and off-line diagnosis system make the maintenance easy.

CRM 9250

Intelligent Cash Recycler

CRM 9250 Cash Recycler Module provides 4 advanced features of GRG's leading technology with all independent intellectual property rights owned by GRG.

Unique serial number validation and recognition

- OCR (Optical Character Recognition) technology can record each deposited banknote's serial numbers
- Recognize up to 64 different denominations simultaneously

Intelligent cassette management

- Up to 4 recycling cassette. Maximum 3,000 notes loading per recycling cassette, in total 12,000 notes.
- One multifunctional acceptance cassette. A capacity of maximum 2,000 notes.
- Acceptance cassette has 3 different areas to accept different notes in accordance with customers' requests avoiding disputes between service providers and end-users.
- Cassette full, almost full, empty detection
- Cassettes Swapping Solution for Cash Recycling Module to optimize the current cash cycle.

High process speed and capacity

- Depositing at a speed of 8 banknotes/ second; Maximum 200 banknotes per transaction;

Easy Maintenance

- Modular design, convenient to assemble and disassemble;
- Front or rear service access for convenient maintenance;
- Offline Diagnosis System makes troubleshooting very simple.


As an experienced developer and manufacturer in cash process industry, GRG has ability to provide off-the-shelf compatible and full-service customizable solution to our customers. As an OEM product, CRM9250 can be simply and efficiently integrated to accurately meet customers' requests. Target applications include:

- Recycling ATMs
- Teller Assist Unit
- Financial Services and Government Services (with high capacity media sorting / storage, route distribution)
- Telecom
- Gaming /Casino
- Back-office
- And much more....


Specification

- Media ranges: Length: 130-172mm
Width: 60-85mm
- Maximum notes per transaction: 200 notes
- Reliability: MTBF: 4,500 hrs; Jam Rate: <0.003%; Reject Rate: <1%; Acceptance Rate: >95%; Life: 10 years
- Communication interface: RS-232C (USB is optional); 57,600bps Baud Rates; CRC Verify mode.
- Weight: 125kg (Including 5 empty cassettes)
- Temperature: Operating: 0-50°C; Idle: 0-50°C;
Storage: -10°C -55°C
- Humidity: Operating: 15-85%RH; Idle: 10-90%RH;
- Storage: 5-95%RH
- Power supply: Voltage: DC +36V +10%; Current: +12A;
Power: Idle 50W, operating 430W

Dimensions

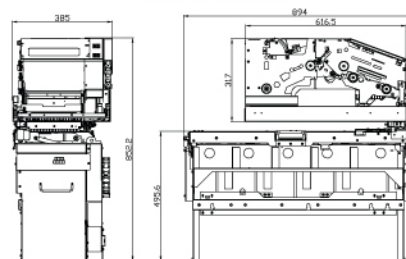

Front Service

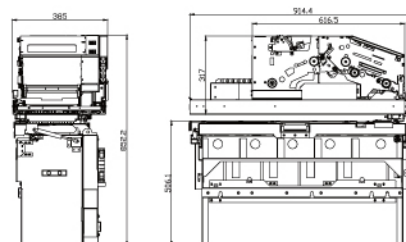

Rear Service

GRG Banking Equipment Co., Ltd

Add: 9 Kelin Road, Science City, Luogang District,
Guangzhou, China 510663
Tel: +86 20 8218 9249
Fax: +86 20 8218 8163
Email: atm@grgbanking.com

Specifications are subject to update without prior notice.
Please consult GRG Banking or its representative for the latest information.